

Coupling

Series M12x1 with vibration lock

Description **AN-KAB.SHS3 2M GERADE**	Article number **3251006291**



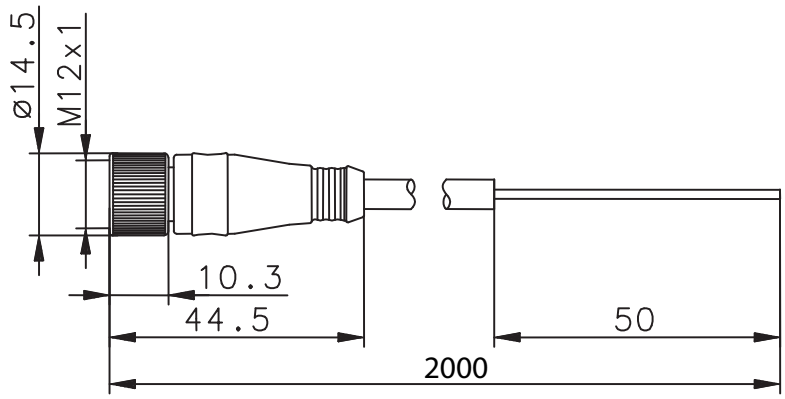

Electrical Data	
Nominal voltage	250 V AC
Rated current	2,5 A (at 70 °C)
Insulation resistance	≥ 10^9 Ω

Mechanical Data		
Number of contacts		6
Degree of protection		IP68
Temperature range		-5 °C ... +105 °C (for flexing applications) -40 °C ... +105 °C (for fixed installation)
Material	Internal pin body	Elastollan R3000
	Coupling nut	E-Coated Zinc
	Moulded cable	PUR
	Cable	LiYwUL2517 6 x 0,34 mm²
	Cable – outer jacket	PVC (Ø5,6 mm)

Technical modifications and errors excepted.
The technical datasheet corresponds to the technical state as of 2015-07-22 and will not be removed in case of changes.